

ITPC-A150 Fan

Intel® Core™/Celeron® Processor - 15" Touch Panel PC



FEATURES

- Fan Cooling Design
- Intel Celeron J1900, 4th Core i3/i5/i7 CPU is optional
- HD LCD screen, brightness up to 350cd/m²
- High sensitivity Resistive touch screen
- Support VESA Mount, Wall Mount ect.


SPECIFICATION

SYSTEM	
Processor	Intel® Celeron® J1900 (Quad core, 2.0G, TDP:10W(optional)) Intel® Core™ i5 4200U (dual core four threads, Max. Turbo boost 2.6G, power 15W) (optional)
Chipset	Integrated Intel® chipset
Memory	1 × DDR3 1333/1600MHz SODIMM, Max. 8 GB
BIOS	64MB Flash ROM
Display Chip	Intel® HD Graphics
Display Port	1 × HDMI, 1 × LVDS, 1 × VGA Support synchronous/asynchronous 2 display
Storage	1 × MSATA 1 × 2.5-inch HDD/SSD
OS Support	Windows 7, Windows 8, Windows 10, Linux
I/O	2 × USB 3.0 2 × USB 2.0 2 × COM Ports 1 × LAN Port 1 × VGA 1 × HDMI 1 × DC-In 1 × Mic 1 × Line Out
Power	DC 12V
Application	Industrial automation, Medical, Transportation, Warehousing, E-education etc.
DISPLAY	
Display Type	15"
Brightness	350 cd/m ²
Contrast	4:3
Resolution	1024 × 768
Touchscreen Type	High sensitivity Resistive touch screen (single touch), Life of up to 30 million times
ENVIRONMENT	
Operating Temperature	-10°C ~ 50°C
Relative Humidity	0% ~ 95% (non-condensing)
Certification	CE, CCC, FCC Class A, RoHS
MECHANISM	
Dimension	352 × 263 × 43 mm
Weight	3.0 kg



DIMENSION

unit:mm

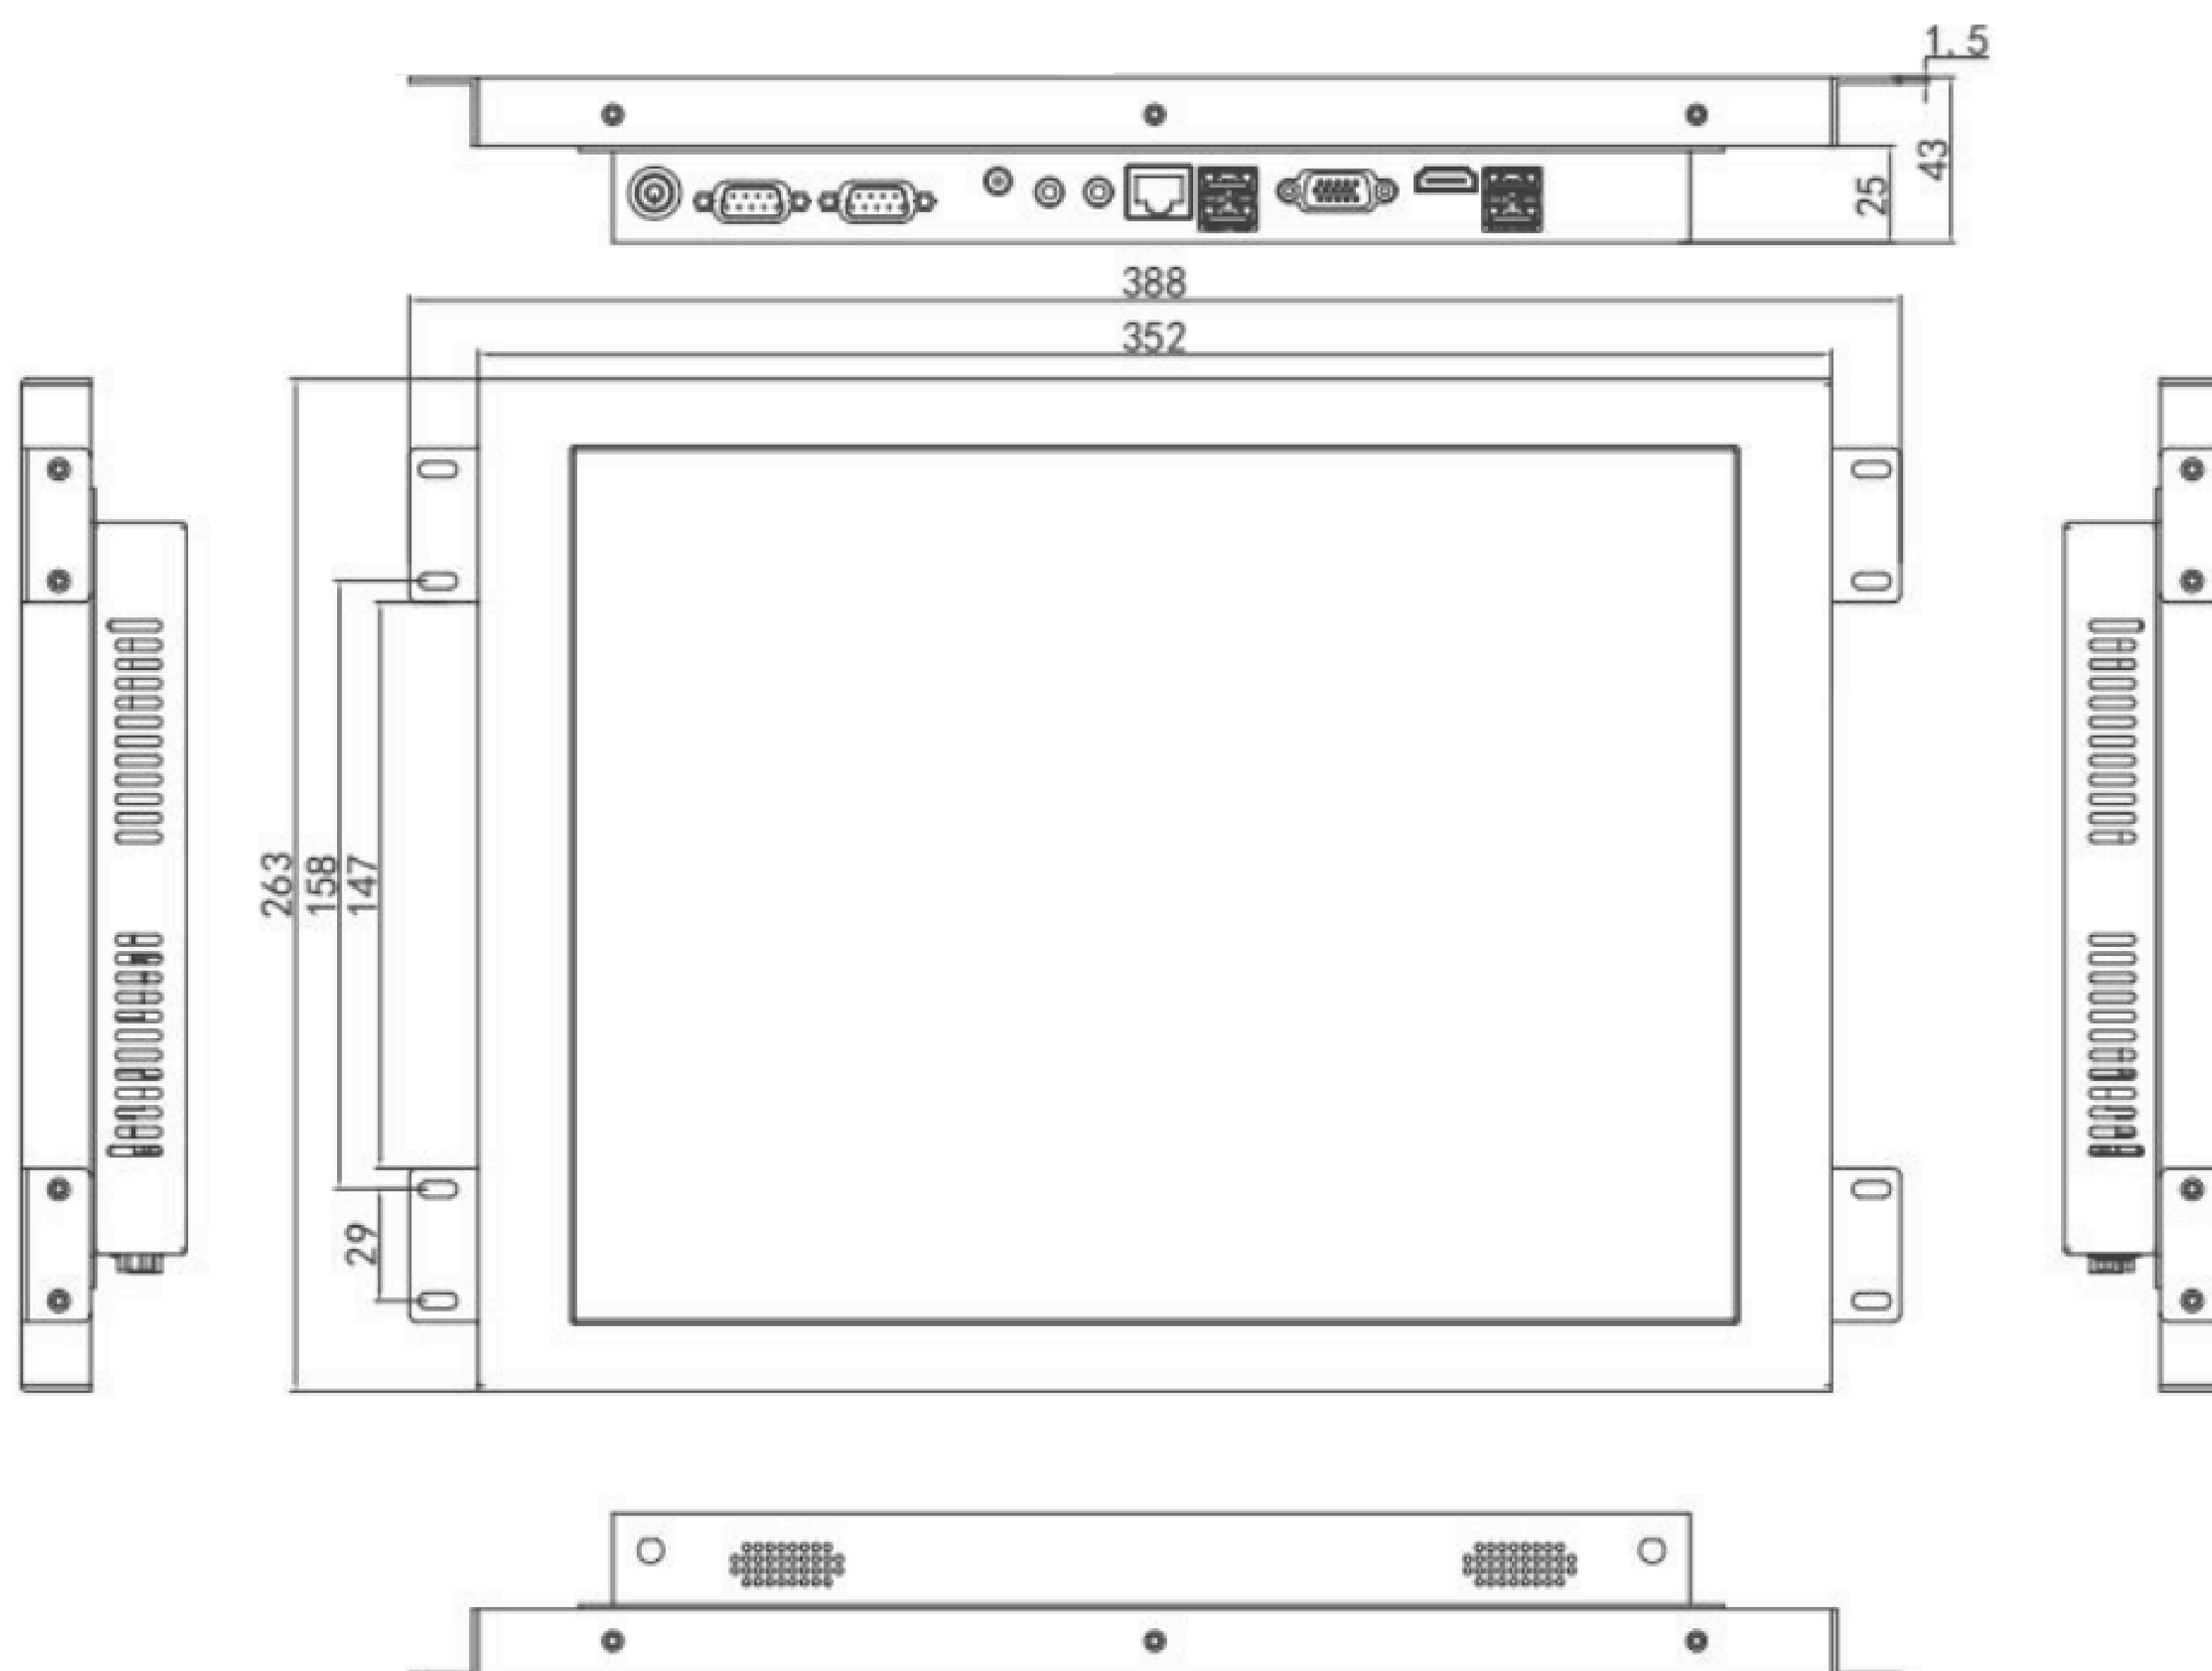

ORDER INFORMATION

IIPC-A150 FAN	CPU	Specification
Configuration 1	Intel® Celeron® J1900	Standard I/O
Configuration 2	Intel® Core™ i3-4100U	
Configuration 3	Intel® Core™ i5-4200U	
Configuration 4	Intel® Core™ i7-4500U	

ACCESSORY

Part Name	Quantity	Specification
Power Adapter	1	12V 5A / 12V 4A is optional
Power Cord	1	CN, US, UK, EU etc.
Eligible Certificate	1	Neutral
Warranty Card	1	Neutral
Embedded Mounting Bracket	4	Applicable standard embedded installation
CD Driver	1	Neutral
Desktop, wall mounted, Stereo stent	1	Optional